
# RAZOR FSL

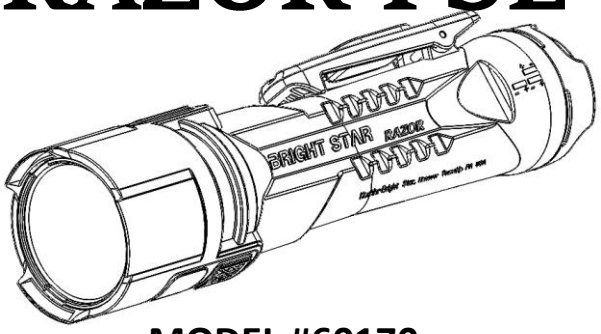


## MODEL #60170

**Intrinsically Safe / À SÉCURITÉ INTRINSÈQUE**

## SAFETY APPROVALS

**Class I, II, III Division 1 Group A-G T2**
**Class I, II, III Division 2 Groups A-D, F, G T2**
**SGSNA26ATEX040601X**
**IECEx SNA 26.0005X**

710182

2809


**II 1 G Ex ia op is IIC T2 Ga**
**IP 64**
**Ta = -20° C to + 40° C**

**4.5 Volts (Battery Powered)**
**Ta = -20° C to + 40° C**

⚠

### Warning Notice:

- **To reduce the risk of ignition of a flammable or explosive atmosphere, batteries must be changed only in a location known to be non-hazardous.**
- **To reduce the risk of explosion do not mix old batteries with used batteries, or mix batteries from different manufactures**
- **Dust layers must be prevented from building up on equipment**
- **The equipment must not be left energized and unattended in Zone20 areas**
- **Do not open when an explosive atmosphere is present / Ne pas ouvrir en présence d'une atmosphère explosive**
- **Substitution of components may impair intrinsic safety / La substitution des composants peut nuire à la sécurité intrinsèque**
- **Replace batteries only with the following models:**
  **KBS Power Solutions, AA, Models KA2500 or KA2600**
  **Duracell, AA, MN1500**
  **Rayovac High Energy LR6**
  **Energizer, AA, Alkaline model E91**

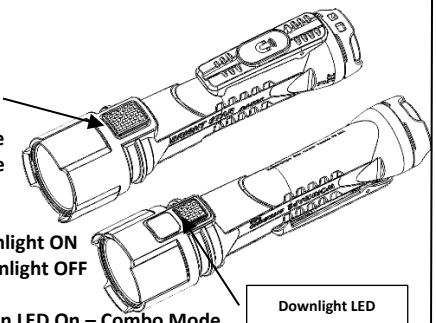



**LED Function**
**1st Main LED Button Press – High Mode**
**2nd Main LED Button Press – Low Mode**
**3rd Main LED Button Press – OFF**

**1st Downlight LED Button Press – Downlight ON**
**2nd Downlight LED Button Press – Downlight OFF**

**Downlight LED Button Press when Main LED On – Combo Mode**

**Battery Replacement**

**1.)** Ensure battery replacement is taking place in a non-hazardous location.
**2.)** Unscrew bottom cap to remove batteries. Place new, approved batteries in Razor as shown below. Markings also found on Razor.

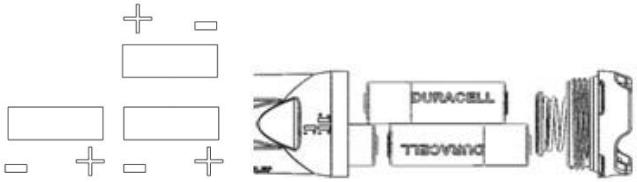


Koehler BrightStar

Rev E 4/26

380 Stewart Road ♦ Hanover Township, PA 18706 USA ♦ 570-825-1900 ♦ Fax: 570-825-1984
www.flashlight.com