CS6365C



50 Amp, 125/250 Volt, Black & White Locking Plug, Industrial Grade

50Amp, 125/250V AC, Non-NEMA, 3P, 4W, Black & White Locking Plug, Industrial Grade, Grounding, California-Style(CS) – BLACK-WHITE

- Captive, quick drive assembly screws for faster assembly
- Rugged nylon construction resists impact, heat, chemicals, and rough use
- Ratings and NEMA I.D. permanently marked on device
- Industry exclusive limited lifetime warranty

UPC Code : 078477326183

Country Of Origin : Mexico

NEMA : Non-NEMA

Technical Information

Electrical Specifications

Amperage : 50 A

Current Interrupting : Certified for current interrupting at full rated current

Dielectric Voltage Withstand : 2000V minimum per UL 498

Grounding : Grounding

Maximum Working Voltage : 125/250V as rated

Pole : 3

Temperature Rise : Max 30ºC temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

Voltage : 125/250 VAC

Wire : 4

Environmental Specifications

Environment : Dry

Flammability : UL94V-2

Operating Temperature : -40° C to 75°C

Material Specifications

Assembly Screws : Brass

Cable Clamp Screw : Philips Head, SS 304

Color : Black-White

Dust Shield : Santoprene TPE

Face Module : Nylon

Ground Post : Brass

Ground Shunt : Bronze

Housing Material : Nylon

Plug Blade : 0.1000inch thick Brass

Mechanical Specifications

Cord Range : .680 - 1.125

Product ID : Ratings and Catalogue No. molded into face and stamped into shroud

Terminal Accom. : #10 min to #4max AWG Solid or Stranded Wire

Terminal ID : X, W, Y, Z and Green for ground

Torque Range : allen wrench to 35 inch-lbs

Plug Blade Shroud : SS 302 /304

Standard Cable Clamp : Nylon

Terminal Block : 0.062inch thick Copper

Terminal Set Screw : SS 302 /304

Wiring Chamber : Nylon

Product Features

Brand : Black and White

Color : Black-White

Device Type : Locking Plug

NEMA : Non-NEMA

Standards and Certifications

CSA C22.2 No. 42 : File 152105


NOM : 057

RoHS : Compliant

UL 498 : File E13399

Warranty : Limited Lifetime Warranty

Dimensional Drawing

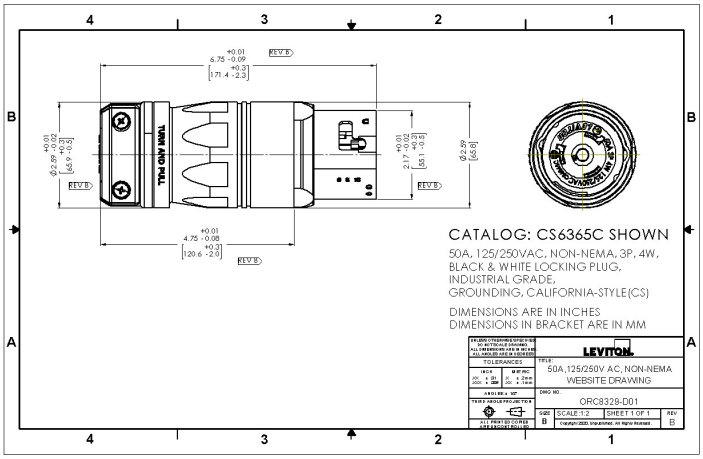

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 · FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.