

RoughReady

WORKSITE
LIGHTING AND POWER SOLUTIONS

The Rough Ready series provides portable, explosion-proof LED lighting meticulously engineered **to thrive in hazardous and industrial environments** where safety and reliability are paramount:

CLASS I DIV. 1

CLASS II DIV. 1

CLASS I DIV. 2

CLASS III

UL 1598

UL 1598A

Key Features

1. Lightweight & Compact

Low profile and lightweight design is perfect for fixed use in tight spaces with hazardous vapors

2. High Efficiency

Delivers up to 160 lm/W - the top in efficiency for explosion-proof rated lights, allowing you to power more lights from a single circuit.

3. Multiple Beam Angles



35°, 60°, 90°, 110°, T2, T3, T4, different lens provide more choices for various scenarios.

4. Retro it Friendly

Installation complexity reduced through standardized mounting system, streamlining project planning and deployment.

5. Build To Last

Copper-free aluminum housing and impact resistant lens sealed from the outside environment provides ingress protection against water and dust in harsh industrial environments

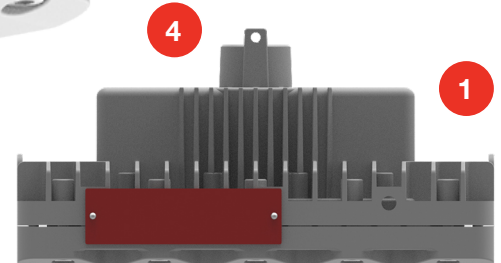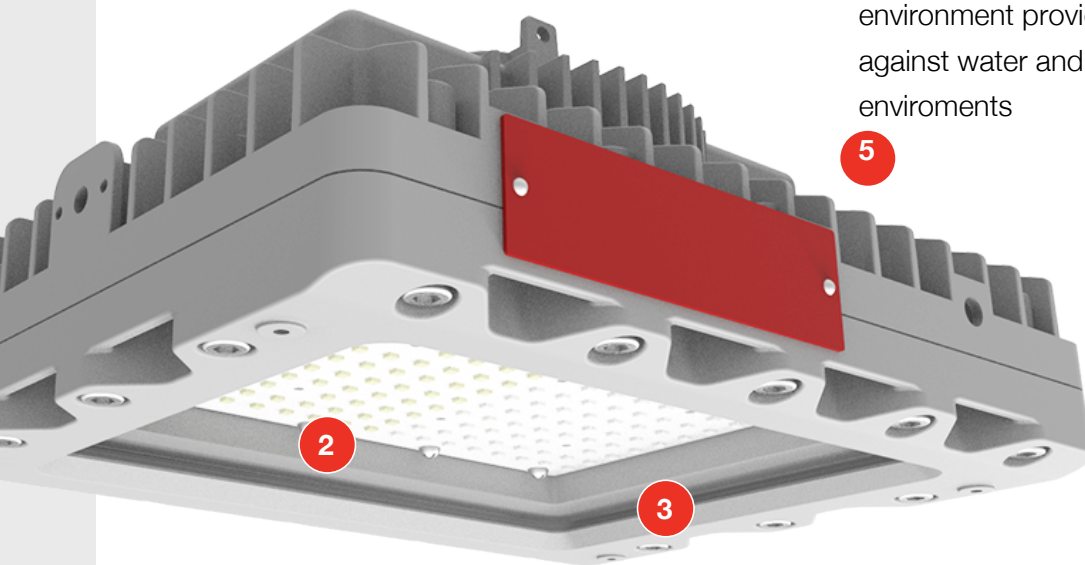

7 Mounting Options



Pendant



Trunnion Bracket



Wall 90°



Wall 25°



Stanchion 90°



Stanchion 25°



Ceiling

EXPLOSION PROOF AREA LIGHTING

Classifications

NEC/CEC Standard

- UL 844 Hazardous Locations
 - Class I Division 1, Group C, D
 - Class I Division 2, Group A, B, C, D
 - Class II Division 1, Group E, F, G
 - Class II Division 2, Group F, G
 - Class III
- UL 1598 Wet Locations
- UL 1598A Marine Outside Type (Salt Water)
- UL 8750 LED Safety
- Paint Spray Booth
- CSA C22.2 NO. 250.0

Technical Data

Electric & Optical

Rated Power	Input Voltage
60W	AC100-277, 347-480V
Lumen Output	9600 lm

Luminous Efficacy	160 Lm/W
Beam Angle	35°/60°/90°/110°/T2/T3/T4
Color Temperature	Amber 2700K 3000K 4000K 5000K
CRI	Ra>70


Environmental & Technical

Ambient Temperature	-40°C~+65°C
Ambient Humidity	10%~90% RH
Lens Material	Glass
Mounting Options	Pendant / Ceiling / Wall mount / Stanchion / U-Bracket
Cable Entries	3/4" NPT, 1-1/4" NPT, 1-1/2" NPT
Net Weight	27.5 LBS

Options And Accessories

- Transparent / frosted glass options
- 1-10V dimming capabilities
- L70 > 150,000 operation hours@ 60°C
- 5-year limited system warranty

 sales@worksitelighting.com

 8778615255

 worksitelighting.com

