



Safe - Lume

LED Highbay Lighting

Up to 24,000lm, This Fixture is specially designed for different applications from harsh environment conditions to ordinary industrial workshops.

Features



- Wattage range from 80W~200W (9,600~24,000lm)
- Luminous efficiency up to 120lm/W
- Copper-free aluminum body corrosion resistant
- Safe and reliable heat transfer
- Thermal shock and impact resistant tempered
- 120V, 220V, 277V available
- 5-year limited system warranty

Compliance

CE
UL 1598 Wet Locations
UL 8750 LED Safety
IP67
IK10

Dimensions

Dimensions in millimeters(mm)(in)

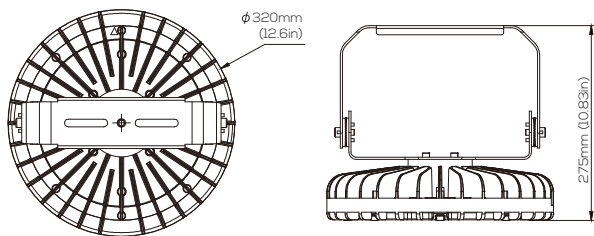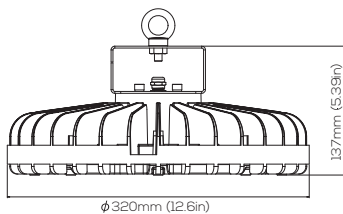

Technical Data

Electric

Rated Power	80W / 100W / 150W / 200W
Input Voltage	120V / 220V / 277V AC
Input Frequency	50/60Hz
Power Factor	> 0.9
Driver Efficiency	≥ 90%
DC output Ripple & Noise	< 200mVP-P

Optical

Lumen Output	9,600lm ~ 24,000lm
Luminous Efficacy (Lumens per Watt)	120Lm/W
Beam Angle	60° / 90° / 120°
Correlated Color Temperature (CCT)	2700K 3000K 4000K 5000K
CRI	Ra>70

Environmental

Ambient Operating Temperature	-40°C~+60°C
Ambient Operating Humidity	10%~90% RH

Technical

Lens Material	PC / Glass
Mounting Options	U-bracket / Hanging
Net Weight	4kg

Mounting Options



UB1
U-Bracket



MBB
Malleable Hook



HB4
Hanging Ring

Accessories



HRR
Hanging Ring



HEE
Hanging Malleable
Hook



SC0
Safety cable
Ø8 (4mm)



UBB
U - Bracket